Signal

SIGNAL is a range of highly versatile signalling equipment. Manufactured from polycarbonate with a methacrylate banner, they provide visibility of up to 30 m. Suitable for a variety of mounting configurations.

Exit signs

Versions

Signal surface
Signal track-mounted

VIEWING DISTANCE = 30 m

Diffusers



Control options

DALI

Finish

RAL9016 RAL9005

Customization

Finish
Remote control

Signal

Exit signs





	Surface	**Track-mounted**
Duration	1/3 h	1/3 h
Operating modes	Maintained Non-maintained	Maintained
CCT	5700	5700
Versions	Standard Autotest DALI Central Battery System	Standard Autotest
Battery	Ni-MH Ni-Cd	Ni-MH Ni-Cd
Charging	Max. 24 h	Max. 24 h
IP IK	20 04	20 04
Power supply	230 Vac / 24 Vdc	230 Vac / 24 Vdc
Mounting options	Surface Wall-mounted pararell Wall-mounted perpendicular* Recessed* Suspended*	Track-mounted
Standards	EN IEC 60598-2-22 EN IEC 60598-1	EN IEC 60598-2-22 EN IEC 60598-1
Viewing distance EN ISO 1838	30 m	30 m

LED

** Using an accessory*

Each fitting includes:

- 1 fitting
- 1 diffuser blade
- 4 pictograms (2 left, 1 down, 1 white)

Signal

Surface

IP 20

● **Black** Add "-4" to the reference.

Standard

NON-MAINTAINED

REF.			
SNE	○	1 h	8
SNE3	○	3 h	8

MAINTAINED

REF.			
SN	○	1 h	8
SN3	○	3 h	8

Autotest

REF.			
SNEA	○	1 h	8
SNEA3	○	3 h	8

REF.			
SNA	○	1 h	20
SNA3	○	3 h	20

DALI

REF.			
SNEID	○	1 h	8
SNEID3	○	3 h	8

REF.			
SNID	○	1 h	8
SNID3	○	3 h	8

Central Battery System

MAINTAINED

	REF.		POWER SUPPPLY	COMSUMPTION	CURRENT	
Standard C24	**SN-S24**	○	24 Vcc	1,7 W	1,700 A	8
Addressable C24i	**SNI-S24**	○	24 Vcc	2,4 W	2,400 A	8
230V	**SN-S**	○	230 Vca	1,8 W	1,800 A	8

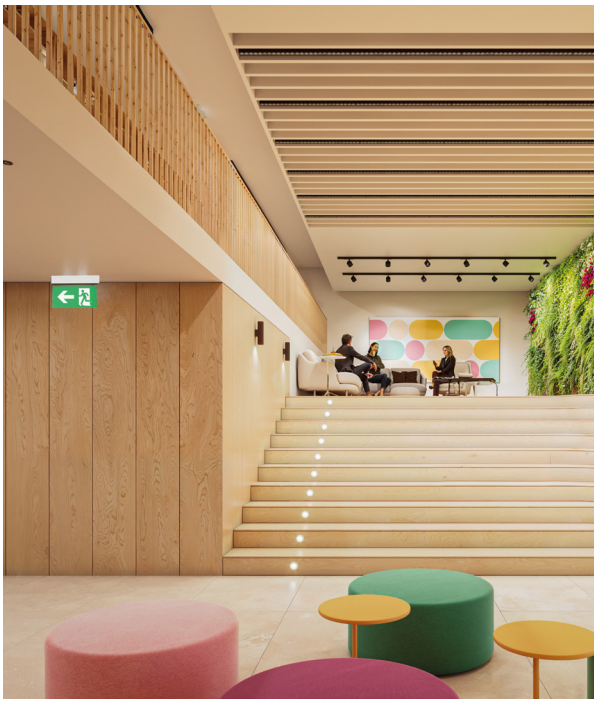

Signal

Track-mounted

IP 20

● **Black** Add "-4" to the reference.

Standard

NON-MAINTAINED

REF.		LUMEN		
SNT	○	-	1 h	8

Autotest

MAINTAINED

REF.		LUMEN		
SNTA3	○	-	3 h	8

Accessories

● **Black** Add "-4" to the reference.

Pictograms

Type PSN Pictogram 347 × 150 mm. *References according to table below*

Type PSN
347 × 150 mm

REF. **PSN-A**

REF. **PSN-A**

REF. **PSN-NSD**

REF. **PSN-NSU**

Maximum viewing distance
(according to EN ISO 1838 for internally illuminated signs) 30 m

	REF.	
Recession frames	**SN-ME**	Recession frame
Suspended	**SNKS-C**	Ceiling suspension accessory, 100 mm long
	SNKS-30	Ceiling suspension accessory, 300 mm long
	SNKS-100	Ceiling suspension accessory, 1000 mm long
	SNKS-F	Adjustable ceiling suspension accessory

PLEASE CHECK FOR OTHER PICTOGRAMS

Normagrup Technology Headquarters
Parque Tecnológico de Asturias. C/Ablanal, 1
33428 Llanera (Asturias), Spain

Normagrup UK
Normagrup Netherlands
Normagrup France

normagrup.com

Specifications subject to updates or modifications.

Normagrup